


IMBA-C2060-R20

ATX motherboard supports 32nm LGA1155 Intel® Xeon® E3/Core™ i3/ Celeron® CPU per Intel® C206, DDR3, VGA/DVI/HDMI, Dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, Audio and RoHS

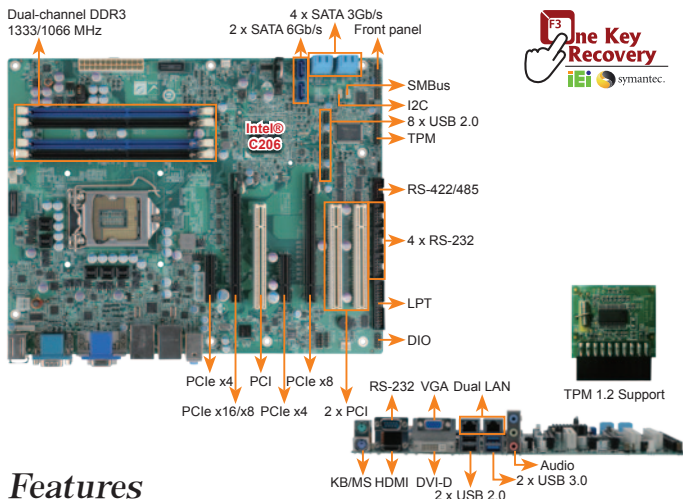

Features

1. LGA1155 Intel® Xeon® E3 and Intel® Core™ i3 processor supported
2. Dual-channel 1333 MHz DDR3 supports up to 32 GB memory
3. Intel® PCIe GbE with Intel® AMT 7.0 support
4. Providing high-speed graphics interface by two PCIe x8/PCIe x4 add-on cards
5. USB 3.0 and SATA 6Gb/s supported
6. IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

- ◆ CPU: LGA1155 socket supports Intel® Xeon® E3 quad/dual, core™ i3 dual, Celeron® dual core processor
- ◆ System Chipset: Intel® C206
- ◆ Memory: Four 240-pin 1333/1066MHz dual-channel DDR3 SDRAM ECC and non-ECC unbuffered DIMM supported (system max. 32GB)
- ◆ BIOS: UEFI BIOS
- ◆ Ethernet: LAN1: Intel® 82574L PCIe controller; LAN2: Intel® 82579 PHY with Intel® AMT 7.0 supported
- ◆ Graphics Engine: Support for DX10.1 and OpenGL3.0, Full MPEG2, VC1, AVC Decode
- ◆ Display Output: Dual display supported; 1 x VGA; 1 x HDMI; 1 x DVI-D
- ◆ Super I/O: Fintek F81866
- ◆ Audio: Realtek ALC892 HD Audio codec (Line-in, Line-out, Mic)
- ◆ I/O Interface: 5 x RS-232 (1 x RS-422/485); 1 x LPT; 1 x PS/2 KB/MS; 4 x SATA 3Gb/s with RAID 0/1/5/10 support; 2 x SATA 6Gb/s with RAID 0/1/5/10 support; 10 x USB 2.0 (2 by rear IO, 8 by pin header); 2 x USB 3.0 by NEC D720200F1
- ◆ Front Audio: 2 x 5-pin header

- ◆ TPM: 1 x TPM connector (2x10 pin)
- ◆ SMBus: 1 x 4-pin wafer
- ◆ I2C: 1 x 4-pin wafer
- ◆ Expansion: 2 x PCIe x16 (share 1 PCIe x16 signal); 2 x PCIe x4 slots; 3 x PCI slots
- ◆ Watchdog Timer: Software programmable supports 1~255 sec. system reset
- ◆ Digital I/O: 8-bit digital I/O (4-bit input, 4-bit output)
- ◆ Fan Connector: 1 x 4-pin CPU fan connector; 2 x 3-pin system fan connector
- ◆ Power Supply: ATX power supply
- ◆ Power Consumption: 3.3V@1.61, 5V@2.79A 12V@0.50A, Vcore@5.59A, 5VSB@0.16A (Intel® Xeon® E3-1275 3.40GHz CPU with four 1333MHz 2GB DDR3 memory)
- ◆ Operating Temperature: -10°C ~ 60°C
- ◆ Storage Temperature: -20°C ~ 70°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 244mm x 305mm
- ◆ Weight: GW:1200g, NW: 700g

| Slot | PCIe x16 | PCIe x8 | PCIe x4 | PCI |
|-----------------|----------|---------|---------|-----|
| Configuration 1 | 1 | N/A | 2 | 3 |
| Configuration 2 | N/A | 2 | 2 | 3 |
| Configuration 3 | N/A | 1 | 2 | 3 |

Packing List


| | |
|---|----------------------|
| IMBA-C2060-R20 single board computer | |
| 1 x I/O shielding (P/N: 45014-0028C0-01-RS) | 1 x Mini jumper pack |
| 4 x SATA cable (P/N: 32000-062800-RS) | 1 x Utility CD |
| 1 x One Key Recovery CD | 1 x QIG |

Ordering Information

| Part No. | Description |
|---------------------|---|
| IMBA-C2060-R20 | ATX motherboard supports 32nm LGA1155 Intel® Xeon® E3/ Core™ i3/Celeron® CPU per Intel® C206, DDR3, VGA/DVI/HDMI, dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, Audio and RoHS |
| 19800-003100-300-RS | Dual ports USB cable with bracket |
| 32102-000100-200-RS | SATA power cable |
| 32205-003800-300-RS | RS-422/485 cable, 200mm |
| CF-1156A-RS-R11 | High performance LGA1155/LGA1156 cooling kit, 1U chassis compatible, 73W |
| CF-1156E-R11 | High performance LGA1155/LGA1156 cooling kit, 95W |
| 19800-000049-RS | LPT cable |
| 19800-000051-RS | RS-232 cable, 230mm |
| TPM-IN01-R11 | 20-pin Infineon TPM module, software management tool, firmware V3.17 |

IMBA-Q670-R30

ATX motherboard supports LGA1155 Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU with Intel® Q67, DDR3, VGA/DVI-D/HDMI, Dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, HD Audio and RoHS

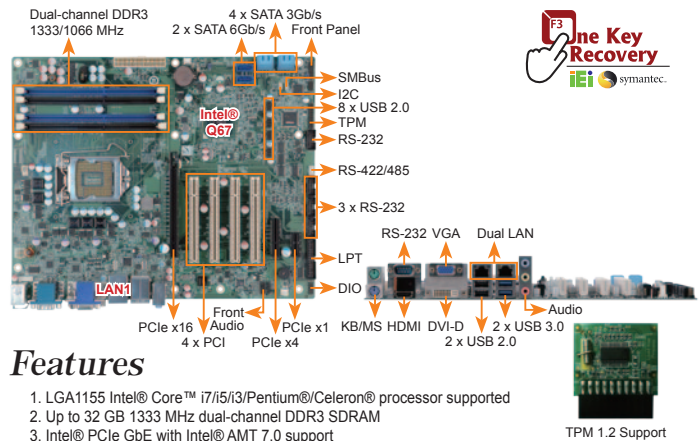

Features

1. LGA1155 Intel® Core™ i7/i5/i3/Pentium®/Celeron® processor supported
2. Up to 32 GB 1333 MHz dual-channel DDR3 SDRAM
3. Intel® PCIe GbE with Intel® AMT 7.0 support
4. USB 3.0 and SATA 6Gb/s supported
5. IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

- ◆ CPU: LGA1155 socket supports Intel® Core™ i7/i5/i3/ Pentium®/Celeron® processor
- ◆ System Chipset: Intel® Q67
- ◆ Memory: Four 240-pin 1333/1066MHz dual-channel unbuffered DDR3 SDRAM DIMM supported (system max. 32GB)
- ◆ BIOS: UEFI BIOS
- ◆ Ethernet: LAN1: Intel® 82583V PCIe controller; LAN2: Intel® 82579 PHY with Intel® AMT 7.0 supported
- ◆ Graphics Engine: Support for DX10.1 and OpenGL3.0 Full MPEG2, VC1, AVC Decode
- ◆ Display Output: Dual display supported; 1 x VGA; 1 x HDMI; 1 x DVI-D
- ◆ Super I/O: Fintek F81866
- ◆ Audio: Realtek ALC662 HD Audio codec (Line-in, Line-out, Mic)
- ◆ Front Audio: 1 x 10-pin header
- ◆ TPM: 1 x TPM connector (2x10 pin)
- ◆ SMBus: 1 x 4-pin wafer
- ◆ I2C: 1 x 4-pin wafer
- ◆ I/O Interface: 5 x RS-232 (1 x RS-422/485); 1 x LPT; 1 x PS/2 KB/MS; 4 x SATA 3Gb/s with RAID 0/1/5/10 support; 2 x SATA 6Gb/s with RAID 0/1/5/10 support; 2 x USB 3.0 by NEC D720200F1; 10 x USB 2.0 (2 by Rear IO, 8 by pin header)
- ◆ Expansion: 1 x PCIe x16 slot; 1 x PCIe x1 slot; 1 x PCIe x4 slot; 4 x PCI slots
- ◆ Watchdog Timer: Software programmable supports 1~255 sec. system reset
- ◆ Digital I/O: 8-bit digital I/O (4-bit input, 4-bit output)
- ◆ Fan Connector: 1 x 4-pin CPU Fan Connector; 2 x 3-pin system Fan Connectors
- ◆ Power Supply: ATX/AT power supply
- ◆ Power Consumption: 3.3V@1.65A, 5V@6.31A, 12V@0.18A, Vcore@7.88A, 5VSB@0.15 (Intel® Core™ i5-2400 3.10GHz CPU with four 4 GB 1333MHz DDR3 memory)
- ◆ Operating Temperature: -10°C ~ 60°C
- ◆ Storage Temperature: -20°C ~ 70°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 244mm x 305mm
- ◆ Weight: GW:1200g, NW: 700g

Packing List

| | |
|---|----------------------|
| 1 x IMBA-Q670 single board computer | |
| 1 x I/O shielding (P/N: 45014-0028C0-01-RS) | 1 x Mini jumper pack |
| 4 x SATA cable (P/N: 32000-062800-RS) | 1 x Utility CD |
| 1 x One Key Recovery CD | 1 x QIG |

Ordering Information

| Part No. | Description |
|---------------------|---|
| IMBA-Q670-R30 | ATX motherboard supports LGA1155 Intel® Core™ i7/i5/i3/Pentium®/ Celeron® CPU with Intel® Q67, DDR3, VGA/DVI-D/HDMI, dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, HD Audio and RoHS |
| 19800-003100-300-RS | Dual-port USB cable with bracket |
| 32102-000100-200-RS | SATA power cable |
| 32205-003800-300-RS | RS-422/485 cable, 200mm |
| 19800-000049-RS | LPT cable |
| 19800-000051-RS | RS-232 cable, 230mm |
| TPM-IN01-R11 | 20-pin Infineon TPM module, software management tool, firmware V3.17 |
| CPU-DT-i5-2500T | Intel® Core™ i5-2500T processor, LGA1155, quad core 2.3GHz, 6M cache, 45W, compatible with CF-1156C-RS CPU cooler |
| CPU-DT-i5-2390T | Intel® Core™ i5-2390T processor, LGA1155, dual core 2.7GHz, 3M cache, 35W, AMT, compatible with CF-1156C-RS CPU cooler |
| CPU-DT-i3-2120T | Intel® Core™ i3-2120T processor, LGA1155, dual core 2.6GHz, 3M cache, 35W, compatible with CF-1156C-RS CPU cooler |
| CPU-DT-P-G630T | Intel® Pentium® G630T processor, LGA1155, dual core 2.3GHz, 3M cache, 35W, compatible with CF-1156C-RS CPU cooler |
| CPU-DT-C-G440 | Intel® Celeron® G440 processor, LGA1155, single core 1.6GHz, 1M cache, 35W, compatible with CF-1156C-RS CPU cooler |
| CF-1156A-RS-R11 | High-performance LGA1155/LGA1156 cooler kit, 1U chassis compatible, 73W |
| CF-1156C-RS | LGA1155/LGA1156 cooler kit, 1U chassis compatible, 45W |
| CF-1156D-RS | LGA1155/LGA1156 cooler kit, 1U chassis compatible, 65W |
| CF-1156E-R11 | High-performance LGA1155/LGA1156 cooler kit, 95W |