

# Power Supply

PS/2 DC Input AT Type



## ACE-925C

DC 24V

**220W**




Input Type	19 ~ 30VDC					
Output Voltage	+3.3V	+5V	+12V	-5V	-12V	+5Vsb
		25A (4A min)	6A	1A	2A	
Efficiency	65%					
Temperature	0 ~ 50°C (Operating), -40 ~ 75°C (Storage)					
MTBF(hrs)	200,000					
Output Connector	P8+P9 x1, HDD/CDROM x3, FDD x2					

### Ordering Information

- ACE-925C-RS  
220W 24V DC input PS/2 Type AT Power Supply

ACE-925C

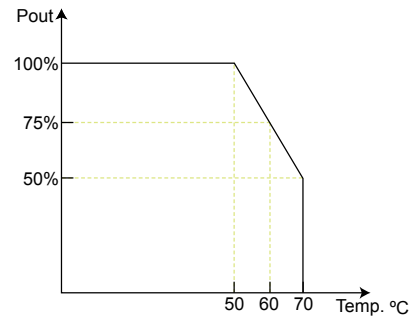

## ACE-932T

DC -48V

**300W**




Input Type	-40 ~ -70VDC					
Output Voltage	+3.3V	+5V	+12V	-5V	-12V	+5Vsb
		33A (1A min)	8A	0.5A	3A	
Efficiency	70%					
Temperature	-20 ~ 70°C (Operating), -40 ~ 75°C (Storage)					
MTBF(hrs)	140,000					
Output Connector	P8+P9 x1, Extra +5V(P10) x1, HDD/CDROM x4, FDD x2					

### Ordering Information

- ACE-932T-RS  
300W -48V DC input PS/2 Type AT Power Supply

ACE-932T

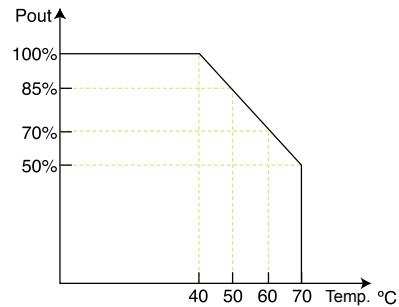

## ACE-925P

DC 110V

**250W**



Input Type	100 ~ 120VDC					
Output Voltage	+3.3V	+5V	+12V	-5V	-12V	+5Vsb
		25A (1A min)	10A	1A	1A	
Efficiency	70%					
Temperature	0 ~ 50°C (Operating), -40 ~ 75°C (Storage)					
MTBF(hrs)	173,000					
Output Connector	P8+P9 x1, HDD/CDROM x5, FDD x2					

### Ordering Information

- ACE-925P-RS  
250W 110V DC input PS/2 Type AT Power Supply

ACE-925P

