


ACE-890V/C/T/P DC Input Open Frame AT Power Supply



86W

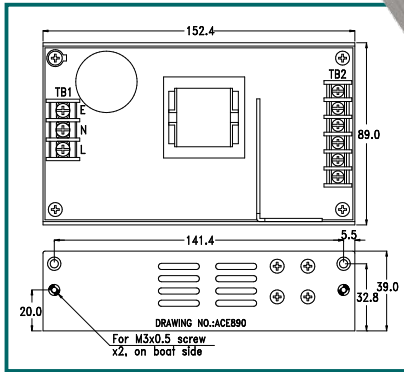

Input Type	9 ~ 16VDC (ACE-890V), 18 ~ 36VDC (ACE-890C), 36 ~ 72VDC (ACE-890T), 70 ~ 132VDC (ACE-890P)				
Output Voltage	+5V	+12V	-5V	-12V	+24V
ACE-890V	9A	2A		0.3A	
ACE-890C/T/P	10A	2.5A		0.5A	
Efficiency	70%				
Temperature	0 ~ 50°C (Operating), -20 ~ 85°C (Storage)				
MTBF (hrs)	245,000 (ACE-890V), 251,000 (ACE-890C), 269,000 (ACE-890T), 265,000 (ACE-890P)				
Output Connector	Option Cable				
Dimension	152.4 x 89 x 39 mm				



Ordering Information

- **ACE-890V-RS**
72W 12V DC Input Open Frame AT Power Supply
- **ACE-890C-RS**
86W 24V DC Input Open Frame AT Power Supply
- **ACE-890T-RS**
86W 48V DC Input Open Frame AT Power Supply
- **ACE-890P-RS**
86W 110V DC Input Open Frame AT Power Supply

Optional 1 Embedded Solution



PN: CB-643EB-RS

DC cable to CPU card, W/4pin 12V CPU/ HDD/ S-ATA connector, 30cm

Optional 2 Backplane Solution



PN: CB-890BP-RS

DC cable to backplane, W/20pin ATX/ HDD/ S-ATA connector, 30cm

ACE-865V/870C/T DC Input Open Frame




60W

ACE-865V



70W

ACE-870C/T

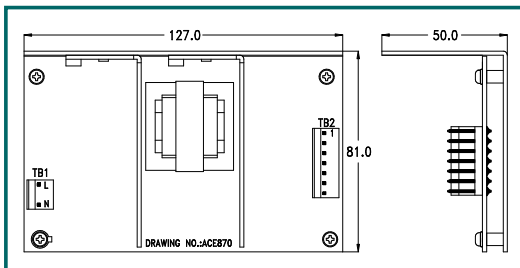

Input Type	8 ~ 16VDC (ACE-865V), 18 ~ 36VDC (ACE-870C), 36 ~ 72VDC (ACE-870T)				
Output Voltage	+5V	+12V	-5V	-12V	+24V
ACE-865V	6A	2A	0.3A	0.5A	
ACE-870C/T	7A	2.5A	0.3A	0.5A	
Efficiency	70%				
Temperature	0 ~ 50°C (Operating), -20 ~ 85°C (Storage)				
MTBF (hrs)	246,000 (ACE-865V), 276,000 (ACE-870C/T)				
Output Connector	Optional Cable				
Dimension	127 x 81 x 50 mm				



Ordering Information

- **ACE-865V-RS**
60W 12V DC Input Open Frame AT Power Supply
- **ACE-870C-RS**
70W 24V DC Input Open Frame AT Power Supply
- **ACE-870T-RS**
70W 48V DC Input Open Frame AT Power Supply

Optional 1 Embedded Solution



PN: CB-870EB-RS

DC cable to CPU card, W/4pin 12V CPU/ HDD/ S-ATA connector, 30cm

Optional 2 Backplane Solution



PN: CB-870BP-RS

DC cable to backplane, W/20PIN ATX/ HDD/ S-ATA connector, 30cm